

3749-77

90°

90°

3749-77

Checking 90° squares.
Specifications

17.040.30
39 3560

01.01.78

90°


1600 .

1. .


1.1.

-
-
-
-
-

(.1);
 (.2);
 (.3);
 (.4);
 (.5).



Черт. 1




Черт.


©
 ©
 ©

, 1977
 , 2003
 , 2008

W
5J
90° I
D



Черт. 4

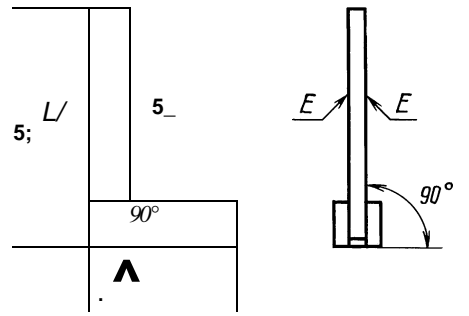

. 5

. 3

, —

; , —

; —

. 1—5.

1.2.

. 1.

; ;

-

1

		L
; ; ;	60	40
	100	60
	160	100
; ;	250	160
; ;	400	250
	630	400
	1000	630
	1600*	1000

* = 1600

1.3.

. 2.

2

	160	250	400	630
D	80	100	125	160

1.4.

. 3.

;	. 1 2	0; 1
		1; 2
	60 400	0; 1; 2
	630 1000	1; 2
	1600	2

— 630

1 0 01.01.96.

01.01.96.

0, = 160 :

-0-160 3749-77

(, . 3, 4).

2.

2.1.

2.2.

(20+3,5) °

(— L) 0,5 ° / ,

.4.

4

L,			
	0	1	2
40	2,5	5,0	—
60	2,5	5,0	13,0
100	3,0	6,0	15,0
160	3,5	7,0	18,0
250	4,5	9,0	22,0
400	6,0	12,0	30,0
630	8,0	16,0	40,0
1000	—	20,0*	40,0*
1600	—	—	90,0

* 01.01.96.

0,

(, . 40 60 2 . 1, 2, 4).
2.3.

.5.

	0	1	2	0	1	2	0	1	2
60	1,0	2,0	4,0	1,5	2,5	5,0	2,5	5,0	10,0*
100	1,0	2,0	4,0	1,5	2,5	5,0	3,0	6,0	12,0*
160	1,5	3,0	6,0	2,0	4,0	8,0	3,5	7,0	14,0*
250	1,5	3,0	6,0	2,0	4,0	8,0	4,5	9,0	18,0*
400	2,5	5,0	10,0	3,0	6,0	12,0	6,0	12,0	25,0*
630	3*	6,0	12,0	4,4=	8,0	16,0	8*	16,0	30,0*
1000	—	10,0	20,0	—	12,0	24,0	—	24,0	40,0*
1600	—	—	30,0	—	—	36,0	—	—	60,0*

* 01.01.96.

(, . 2,4).

2.4.

L,

.6.

L,						
	o	1	o	1	o	1
40; 60	1,0	2,0	1,5	2,5	2,5	5,0
100	1,0	2,0	1,5	2,5	3,0	6,0
160	1,5	3,0	2,0	4,0	3,5	7,0
250	1,5	3,0	2,0	4,0	4,5	9,0

1,

40 60

(, . 1,2).

2.5.

.7.

	0	1	0	1
160	1,5	3,0	1,5	2,5
250	1,5	3,0	2,0	4,0
400	2,5	5,0	2,0	4,0
630	3,0	6,0	2,0	4,0

(, . 2).

2.6.

0,1

2.7.

.8.

8

	0; 1	2
60	40	125
100	50	160
160	60	200
250	80	250
400	100	320
630	125	400
1000	160	500
1600	—	630

(, . 2).

2.8.

.9.

9

; ;	X, 9	HV 655 2999	55
;	5950, 801 1435	15 8	55 HRC ₃ 3

(, . 3).

2.9.

0,25

2789

.10.

10

		<i>Ra</i> , ,					
		0	1	2	0	1	2
;	. 1 2	0,04	0,04	—	0,08	0,08	—
		0,08	0,08	—	0,16	0,16	—
		—	0,08	0,16	—	0,16	0,32
	400	0,08	0,08	0,16	0,32	0,32	0,63
	. 400	—	0,16	0,32	—	0,63	0,63

400

2-

1-

0,8

(, . 2).

. 6 3749-77

2.10. 0,8 Ra < 0,63 2789.

0,8 Ra < 0,63 2789.

0,8 Ra < 1,25 2789.

(2.11. , . 1, 2).

. 4 6, +15°

11 2.12.

	()
60; 100; 160	20 (196)
250; 400; 630	30 (294)
1000; 1600	40 (392)

(, . 3).

2.13. (0,2+0,1)

2.14.

2.15.

2.16.

2.17.

— 2,5

—5

(, . 3, 4).

2 .

2 . 1.

(, . 3).

2 . 2.

. 2.1—2.7, 2.9-2.11.

2 . 3.

. 2.17

5 (. 2.17), (. 2.17).

2,5

(, . 3, 4).

26.

26.1.

1799.

(, . 4).

26.2.

(50+3) ° ,
35 ° .

(50+3) °

(95+3) %

2 .

26.3.

30 / 2

80—120

15000.

26.2, 26.3. (, . 3).

3.

3.1.

3.2.

— 9.014.

3.3.

2.601.

(, . 1, 3).

3.4.

— 13762.

3.5.

5959

9396.

3.6.

3.4—3.6. (, . 2).

3.7.

15150

(, . 2).

4.

4.1.

(, . 3).

4.2.

—18

(, . 1, 3).

. 8 3749-77

*

1. -

2. -

22.06.77 1551

3. 3749-77

4. -

2.601-95	3.3
9.014-78	3.2
801-78	2.8
1435-99	2.8
2789-73	2.9, 2.10
2999-75	2.8
5950-73	2.8
5959-2000	3.5
9396-88	3.5
13762-86	3.4
15150-69	3.7
1799-87	26.1

5. -

7—95

(11—95)

6. 1979 .,

(2003 .) 1,2,3,4,
1983 ., 1987 ., 1988 . (3-79, 5-83, 11-87, 3-89)

(2008 .)

« » (. 9).

« »

2.601-95
5950-73

«

2.601-2006;
5950-2000.

»

3749:

14.05.2008. 60 841/s.
.1,40. .- . . .0,80. 97 . . .493.

«», 123995 ,, 4.
www.gostinfo.ru info@gostinfo.ru

«» — . «», 105062 ,, 6.